

SPORT & TACTICAL


*MAKmilmont

*MAK*lick*

- *MAKmasterLock
- *MAKnetic
- *MAKuick

MAKStorm PRISMATIC SCOPE 4X301 HD

MAKcam TARGET MOVIE CAMERA

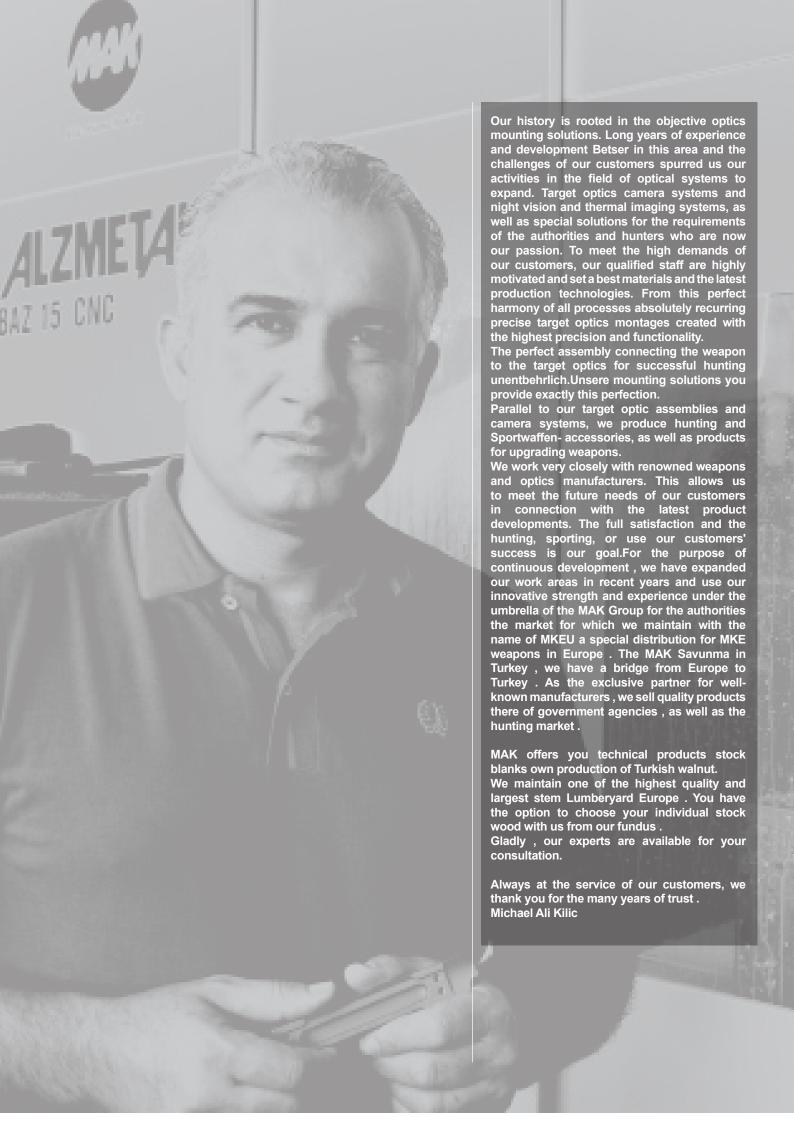

Classic

MAK Classic Pivot mount in two pieces	S.6	
MAK <i>lassic</i> Bases for lockup for pivot mounts	S.8	
MAK <i>lassic</i> Locks and height spacers, for pivot mounts	S.9	
MAK <i>lassic</i> Rear feet for pivot mounts in two pieces	S.10	
MAK <i>lassic</i> Rear rings and rear rail prism for pivot mounts in two pieces	S.11	
MAK <i>lassic</i> Front bases for pivot mounts	S.12	
MAK <i>lassic</i> Front feet for pivot mounts in two pieces	S.14	
Flexible		
MAK <i>flex</i> Mounts - Bridge Mounts	S.18	
MAK <i>flex</i> Parts for MAKflex-, Bridge- and MAKuick Quick Release-Mounts	S.19	

Quick

MAKuick

Quick release mounts in one piece S.24



MAKuick

Quick release mounts in two pieces S.25



MAKuick

Quick release mounts in one piece

for drop barrel S.26



Adapterbases for

one piece quick release mounts S.27



MAKipp

Tipp-off mounts in one piece S.30

MAKipp

Tipp-off mounts in two pieces S.31



Stable

MAKfix

fixed mounts in two pieces S.32





Innovative Mounts for Red Dot Sights

MAKlick S.36



MAKnetic S.37



MAKugel S.38



Tactical

MAK*milmont*Monoblockmounts
S.42



MAK*milmont* with offset

S.42



MAK*milmont*

Quick release mounts in two pieces

S.43



MAK*milmont*

Fixed tipp-off mounts in two pieces S.43



MAK*milmont* equipment

S.44



Optics

MAK*cam* S.48


MAK*cam* equipment S.49



MAKstorm S.50



MAKlassic

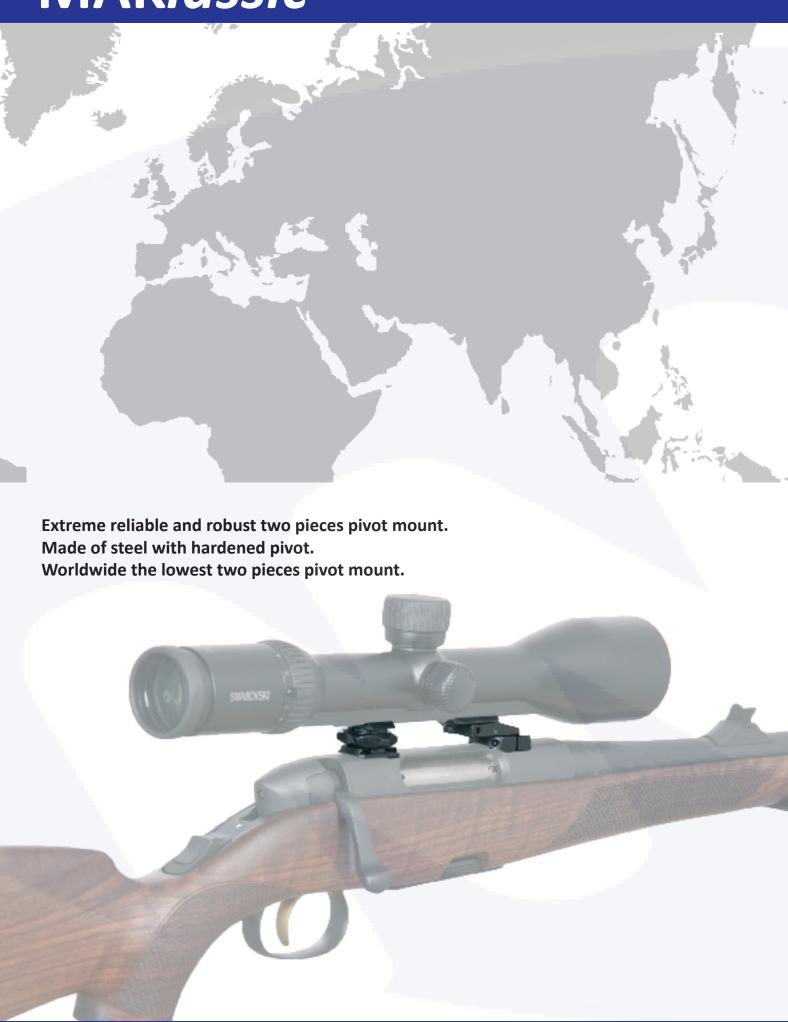



MAKlassic

MAKlassic – two pieces pivot mount.

With rotation or lever lock. For bolt action rifles and drop barrel guns.

Example

MAKschwenk- two pieces pivot mount.

with rotation lock / height 17 mm /

with 26 mm offset frontfoot / for diameter 30 mm maintube / for Sauer 202



10 22 - **30** 080

With rotation lock

<u>15</u>

With lever lock

Height	Order No.
14,0mm	0
15,5 mm	1
17,0 mm	2
18,5 mm*	4
22,0 mm**	7

*only Zeiss ZM/VM **only ø 34 mm

Offset	Order No.
0 mm	0
26 mm	2
34 mm	4
49 mm	6

Scope **Main Tube** LM Zeiss ZM/VM Swarovski Schmidt Bender Diameter 1"/26 mm SR-Rail 30 mm 34 mm 36 mm prism Rail Rail 26 30 34 36 40 45 60 70 Order-No.

WKZ = ID number of the rifle

MAKlassic Bolt action rifle

Manufacturer	Model	WKZ.
Antonio Zoli	1900	067
Benelli	ARGO	003
Brno	CZ 527 / Fox / ZKB 680 ZKK 600 / CZ 550 CZ 531	041 047 065
Carl Gustav	1896 / 1900 2000/ 3000 4000	005 095 037
Fabarm	Iris	040
FN Browning	A-Bolt / Eurobolt BAR 1 / BAR 2 / CBL / Acera BLR / CLR European Browning Mauser X-Bolt	002 003 057 056 004 128
Haenel	Jaeger 10	110
Heckler & Koch	SLB 2000	058
Heym	SR 20 SR 21 SR 30	060 039 099
Kongsberg	M389	061
Krico	600 / 700 / 900 / 902	006
Lakelander	M 389	071
Mauser	M 12 225 Titan 2 66 94 / 96 > Nr. 96011999 94 / 96 Nr. 96012000 > K 98	020 035 009 094 096 010
Merkel	SR 1	117
Parker Hale	Safari 1200	011
Remington	700 7400 / 7600 seven	012 013 078

Manufacturer	Model	WKZ.
RWS/Rössler	Titan 6	108
Sabatti	Rover	075
Sako	Forester/Finnbear/Finnwolf	053
	75 / 85	054
Santa Barbara	Bolt action rifle	044
Sauer	80 / 90 / 92	015
	200	059
	202	080
	100	082
	101	081
	STR	106
Savage	110 / 116 Kojak	016
Schultz & Larssen	M 97	104
Steyr	Classic SBS	089
	L	093
	M 086	086
	SM 12	090
	SL / L-Jagdmatch	018
	Ultra Light	111
	Scout	112
	Luxus	127
Swiss Arms	SHR 970	109
Tikka	55 / 65 / 558 / 658	031
	590 / 690	043
	Master	038
	Т3	107
Verney Carron	Automatc	066
	Bolt action rifle	019
Voere	2165 Kufstein	021
	Titan 2	045
	2185 Automat	083
Weatherby	Mark V / 300 / Vanguard	023
Winchester	70	024
	70 Modell.223 /.243 WSSM	114
	SXR Vulkan	115
7	Datis t Dasses	000
Zastava	Mini Mauser	008
	70	049

Drop barrel rifle

Manufacturer	Model	WKZ
Antonio Zoli	Drop barrel rifle	505
Beretta	Silver Sable	513
B.Rizzini	Drop barrel gun	502
Browning	525 Express	507
Chapuis	O/U Express Superpose S/S Express Juxtapose	500 503
F.A.I.R techni-mec	Drop barel gun	501
Krieghoff	Optima / Plus / Classic	511
Merkel	141 SL 1 und SL 2	506 512
Sabatti / Humbert	Drop barel gun	504
Suhl	Triplet	510
Verney Carron	Sagittaire	508

Bases for lock up for pivot mounts

Bolt action rifle

Manufacturer	Model	Order.No
Antonio Zoli	1900	1480-0067
Benelli	ARGO	1480-0003
Brno	CZ 527 / Fox / ZKB 680 ZKK 600 / CZ 550 CZ 531	1480-0041 1480-0047 1480-0065
Carl Gustav	1896 / 1900 2000/ 3000 4000	1480-0005 1480-0095 1480-0037
Fabarm	Iris	1480-0040
FN Browning	A-Bolt / Eurobolt BAR 1 / BAR 2 / CBL / Acera BLR / CLR European Browning Mauser X-Bolt	1480-0002 1480-0003 1480-0057 1480-0056 1480-0004 1480-0128
Haenel	Jaeger 10	1480-0110
Heckler & Koch	SLB 2000	1480-0058
Heym	SR 20 SR 21 SR 30	1480-0060 1480-0039 1480-0099
Kongsberg	M389	1480-0061
Krico	600 / 700 / 900 / 902	1480-0006
Lakelander	M 389	1480-0071
Mauser	M 12 225 Titan 2 66 94 / 96 > Nr. 96011999 94 / 96 Nr. 96012000 > K 98	1480-0020 1480-0035 1480-0009 1480-0094 1480-0096 1480-0010
Merkel	SR 1	1480-0117
Parker Hale	Safari 1200	1480-0011
Remington	700 7400 / 7600 seven	1480-0012 1480-0013 1480-0078

Manufacturer	Model	Order.No
RWS/Rössler	Titan 6	1480-0108
Sabatti	Rover	1480-0075
Sako	Forester/Finnbear/Finnwolf 75 / 85	1480-0053 1480-0054
Santa Barbara	Bolt action rifle	1480-0044
Sauer	80 / 90 / 92 100 101 200 202 STR	1480-0015 1480-0082 1480-0081 1480-0059 1480-0080 1480-0106
Savage	110 / 116 Kojak	1480-0016
Schultz & Larssen	M 97	1480-0104
Steyr	Classic SBS L M 086 SM 12 SL / L-Jagdmatch Ultra Light Scout Luxus	1480-0089 1480-0093 1480-0086 1480-0090 1480-0018 1480-0111 1480-0112 1480-0127
Swiss Arms	SHR 970	1480-0109
Tikka	55 / 65 / 558 / 658 590 / 690 Master T 3	1480-0031 1480-0043 1480-0038 1480-0107
Verney Carron	Automatic Bolt action rifle	1480-0066 1480-0019
Voere	2165 Kufstein Titan 2 2185 Automatic	1480-0021 1480-0045 1480-0083
Weatherby	Mark V / 300 / Vanguard	1480-0023
Winchester	70 70 Modell.223 /.243 WSSM SXR Vulkan	1480-0024 1480-0114 1480-0115
Zastava	Mini Mauser 70	1480-0008 1480-0049

Drop barrel guns

Base for lock up, with prism 15 mm width, 18 mm length, height: 2,5 mm, prepared to be installed in the running rail Drillingen.



Base for lock up, with prism 15 mm width, 22 mm length, height: 2,5 mm, prepared to be installed with dovetail 70°n



Order No: 1490-2200

Base for lock up, with prism 15 mm width, 27 mm length, to be soldered in the rib of a superposed gun.



Order No: 1490-2500

Base for lock up, with prism 15 mm width, 27 mm length, for installation in the running rail of a Drilling



Order No: 1490-2550

Locks and height spacers for pivot mounts

Rotation lock

Use	Height	Order.No
12 mm BBF-Prism	8,0 mm	1400-1208
14 mm Krieghoff-Prism	8,0 mm	1400-1408
15 mm Standard-Prism	8,0 mm	1400-1508



Lever lock with safety

Use	Height	Order.No
15 mm Standard-Prism	8,0 mm	1450-1508



Adapter for EAW rearbase

Use	Height	Order.No
Compatible with all MAK pivot mounts and	4.0 mm	1410-0000
EAW rear base	4,0 111111	1410 0000



Adapter for original Steyr-Base for lock

Use	Height	Order.No
Compatible with all MAK pivot mounts and Steyr-Base for lock up	7,0 mm	1440-1507



Adapter for original Merkel SL I and SL II-Base for lock up

Use	Height	´Order.No
Compatible with all MAK pivot mounts and Merkel SL I- and SL II-Base for lock up	7,5 mm	1420-0807



Height spacers with excenter

Height	Order.No
0,5 mm	1440-0005
1,0 mm	1440-0010
1,5 mm	1440-0015
2,0mm	1440-0020
2,5 mm	1440-0025
3,0 mm	1440-0030
3,5 mm	1440-0035
4,0 mm	1440-0040
4,5 mm	1440-0045
5,0 mm	1440-0050
5,5 mm	1440-0055
6,0 mm	1440-0060
6,5 mm	1440-0065
7,0 mm	1440-0070
7,5 mm	1440-0075

Height	Order.No
8,0 mm	1440-0080
8,5 mm	1440-0085
9,0 mm	1440-0090
10,0 mm	1440-0100
10,5 mm	1440-0105
11,0 mm	1440-0110
11,5 mm	1440-0115
12,0 mm	1440-0120
15,0 mm	1440-0150
20,0 mm	1440-0200

Intelligent windage adjustment

The windage adjustment for the pivot mounts are made through an excentric of 0,6 mm.



Rear rings, rear rail, complete rear feet

Rear foot,

with Rotation Lock, for prism 15 mm width, for two piece pivot mounts

Ring

Height 2,0 mm Height spacer 12,0 mm

Rotation lock 8,0 mm

Rotation lock 8,0 mm

 Diameter 1"/26 mm
 Order No. 1458-2600

 Diameter 30 mm
 Order No. 1458-3000

 Diameter 34 mm
 Order.No. 1458-3400

LM-Prism

Height 2,0 mm Height spacer 12,0 mm Rotation lock 8,0 mm

Order.Nr. 1458-4000

Zeiss ZM/VM-Rail

Height 3,0 mm Height spacer 12,0 mm Rotating lock 8,0 mm

Order.Nr. 1458-4500

Swarovski SR-Rail

Height 2,0 mm Height spacer 12,0 mm Rotation lock 8,0 mm

Order.No 1458-6000

Schmidt & Bender-Rail

Height 2,0 mm Height spacer 12,0 mm Rotation lock 8,0 mm

Order.No<u>. 1458-7000</u>

Rear foot,

with Lever Lock, for prism 15 mm width, for two piece pivot mounts

Ring

Height 2,0 mm Height spacer 12,0 mm Lever lock 8,0 mm

 Diameter 1"/26 mm
 Order.No. 1558-2600

 Diameter 30 mm
 Order.No. 1558-3000

 Diameter 34 mm
 Order.No 1558-3400

LM-Prisma

Height 2,0 mm Height spacer 12,0 mm Lever lock 8,0 mm

Order No.. 1558-4000

Zeiss ZM/VM-Rail

Height 3,0 mm Height spacer 12,0 mm Lever lock 8,0 mm

Order.No 1558-4500

Swarovski SR-Rail

Height 2,0 mm Height spacer 12,0 mm Lever lock 8,0 mm

Order No. 1558-6000





Rear rings, rear rail, complete rear feet

Rear ring in steel, for two piece pivot mounts,

Diameter	Height	Order No.
1"/26 mm	2,0 mm	1460-2602
30 mm	2,0 mm	1460-3002
34 mm	2,0 mm	1460-3402



Rear ring in steel, (halfring) for two pieces pivot mounts,

Diameter	Height	Order No.
30 mm	2,0 mm	1465-3002
34 mm	2,0 mm	1465-3402
36 mm	2,0 mm	1465-3602



Rear rail

or two pieces pivot mounts

LM-Prism

Height 2,0 mm <u>Order No.. 1460-4002</u>

Zeiss ZM/VM-Rail

Height 3,0 mm Order No. 1460-4503

Swarovski SR-Rail

Height 2,0 mm <u>Order No. 1460-6002</u>

Schmidt & Bender- Rail

Height 2,0 mm Order No. 1460-7002



Front bases For pivot mounts

Bolt action rifle

Manufacturer	Model	Order.No
Antonio Zoli	1900	1680-0067
Benelli	ARGO	1680-0003
Brno	CZ 527 / Fox / ZKB 680 ZKK 600 / CZ 550 CZ 531	1680-0041 1680-0047 1680-0065
Carl Gustav	1896 / 1900 2000/ 3000 4000	1680-0005 1680-0095 1680-0037
Fabarm	Iris	1680-0040
FN Browning	A-Bolt / Eurobolt BAR 1 / BAR 2 / CBL / Acera BLR / CLR European Browning Mauser X-Bolt	1680-0002 1680-0003 1680-0057 1680-0056 1680-0004 1680-0128
Haenel	Jaeger 10	1680-0110
Heckler & Koch	SLB 2000	1680-0058
Heym	SR 20 SR 21 SR 30	1680-0060 1680-0039 1680-0099
Kongsberg	M389	1680-0061
Krico	600 / 700 / 900 / 902	1680-0006
Lakelander	M 389	1680-0071
Mauser	M 12 225 Titan 2 66 94 / 96 > Nr. 96011999 94 / 96 Nr. 96012000 > K 98	1680-0020 1680-0035 1680-0009 1680-0094 1680-0096 1680-0010
Merkel	SR 1	1680-0117
Parker Hale	Safari 1200	1680-0011
Remington	700 7400 / 7600 seven	1680-0012 1680-0013 1680-0078

Manufacturer	Model	Order.No
RWS/Rössler	Titan 6	1680-0108
Sabatti	Rover	1680-0075
Sako	Forester/Finnbear/Finnwolf 75 / 85	1680-0053 1680-0054
Santa Barbara	Bolt action rifle	1680-0044
Sauer	80 / 90 / 92 100 101 200 202 STR	1680-0015 1680-0082 1680-0081 1680-0059 1680-0080 1680-0106
Savage	110 / 116 Kojak	1680-0016
Schultz & Larssen	M 97	1680-0104
Steyr	Classic SBS L M 086 SM 12 SL / L-Jagdmatch Ultra Light Scout Luxus	1680-0089 1680-0093 1680-0086 1680-0090 1680-0018 1680-0111 1680-0112
Swiss Arms	SHR 970	1680-0109
Tikka	55 / 65 / 558 / 658 590 / 690 Master T 3	1680-0031 1680-0043 1680-0038 1680-0107
Verney Carron	Automat Bolt action rifle	1680-0066 1680-0019
Voere	2165 Kufstein Titan 2 2185 Automat	1680-0021 1680-0045 1680-0083
Weatherby	Mark V / 300 / Vanguard	1680-0023
Winchester	70 70 Modell.223 /.243 WSSM SXR Vulkan	1680-0024 1680-0114 1680-0115
Zastava	Mini Mauser 70	1680-0008 1680-0049



Front bases For pivot mounts

Drop barrel rifle

Manufacturer	Model	Order.No
Antonio Zoli	Drop barrel rifle	1680-0505
Beretta	Silver Sable	1680-0513
B.Rizzini	Drop barrel rifle	1680-0502
Browning	525 Express	1680-0507
Chapuis	O/U Express Superpose S/S Express Juxtapose	1680-0500 1680-0503
F.A.I.R techni-mec	Drop barrel rifle	1680-0501
Krieghoff	Optima / Plus / Classic	1680-0511
Merkel	141 SL 1 und SL 2	1680-0506 1680-0512
Sabatti / Humbert	Drop barrel rifle	1680-0504
Suhl	Drilling	1680-0510
Verney Carron	Sagittaire	1680-0508

Front base, for pivot mount, to be installed in the running rail, available in the heights 5,0 mm (bottom open) and 6,0 mm (bottom closed) for rib width of 12 mm

Height	Order.No
5,0 mm	1690-1205
6,0 mm	1690-1206



Front base, for pivot mount,to be installed in the running rail, available in the heights 5,0 mm (bottom open) and 6,0 mm (bottom closed) for rib width of 14 mm

Height	Order.No
5,0 mm	1690-1405
6,0 mm	1690-1406



Front base, for pivot mount, which is used to replace a front base of a claw mount, available in the heights 5,0 mm (bottom open) and 6,0 mm (bottom closed)

Height	Order.No
5,0 mm	1690-2205
6,0 mm	1690-2206



Front feet For two pieces pivot mounts

Front foot, diamater 1"/26 mm, with adjustment for vertical tolerances, width of ring: 15 mm

Offset	Height	Order.No
0 mm	12,0 mm	1630-1205
26,0 mm	9,0 mm	1630-2602
26,0 mm	12,0 mm	1630-2622
34,0 mm	9,0 mm	1630-2604
34,0 mm	12,0 mm	1630-2624
49,0 mm	12,0 mm	1630-2626



Front foot, diamater 30 mm, with adjustment for vertical tolerances, width of ring: 15 mm

Offset	Height	Order.No
0 mm	12,0 mm	1630-3020
26,0 mm	9,0 mm	1630-3002
26,0 mm	12,0 mm	1630-3022
34,0 mm	9,0 mm	1630-3004
34,0 mm	12,0 mm	1630-3024
49,0 mm	12,0 mm	1630-3026



Front foot, diamater 34 mm, with adjustment for vertical tolerances, width of ring: 15 mm

Offset	Height	Order.No
26,0 mm	12,0 mm	1630-3422
26,0 mm	17,0 mm	1630-3462
34,0 mm	12,0 mm	1630-3424
34,0 mm	17,0 mm	1630-3464
49,0 mm	12,0 mm	1630-3426
49,0 mm	17,0 mm	1630-3466



Front foot, diamater 36 mm, with adjustment for vertical tolerances, width of ring: 15 mm

Offset	Height)	Order.No
26,0 mm	17,0 mm	1630-3622
34,0 mm	17,0 mm	1630-3624
49,0 mm	17,0 mm	1630-3626



Front food for two pieces pivot mounts

Front foot, LM-Prisma, with adjustment for vertical tolerances, width of rail: 22 mm

Offset	Height	Order.No
0 mm	12,0 mm	1630-4020
26,0 mm	9,0 mm	1630-4002
26,0 mm	12,0 mm	1630-4022
34,0 mm	9,0 mm	1630-4004
34,0 mm	12,0 mm	1630-4024
49,0 mm	12,0 mm	1630-4026



Front foot, Zeiss ZM/VM-Rail with adjustment for vertical tolerances, width of rail: 35 mm

Offset	Height	Order.No
0 mm	13,5 mm	1630-4540
34,0 mm	10,5 mm	1630-4514
34,0 mm	13,5 mm	1630-4544
49,0 mm	13,5 mm	1630-4546



Front foot, Swarovski SR-Rail, with adjustment for vertical tolerances, width of rail: 35 mm

Offset	Height	Order.No
0 mm	12,0 mm	1630-6020
34,0 mm	9,0 mm	1630-6004
34,0 mm	12,0 mm	1630-6024
49,0 mm	12,0 mm	1630-6026



Front foot, Schmidt & Bender-Rail, with adjustment for vertical tolerances, width of rail: 35 mm

Offset	Height	Order.No
0 mm	12,0 mm	1630-7020
34,0 mm	9,0 mm	1630-7004
34,0 mm	12,0 mm	1630-7024
49,0 mm	12,0 mm	1630-7026



MAKflex



MAKflex

- . This mount can be installed on every type of rifle, either bolt action, or drop barrel.
- . The distance between the pivot and the lock is completely adjustable, because the complete rear foot can be slided front and back by openning one screw, which is very practical and revolutionary.
- . The height on the height spacers can also be adjusted with a modular system for the height spacer, which is also very elegant, practical, and revolutionary. (The height spacer is divided into smaller height steps, by means of this system we can change height without any machine work).
- . Without tension, for everything is adjustable.
- . Extremely stable, and recoil proof for all calibers.
- . The scope can be detached very easily and swiftly, without any tools.
- . A large bearing area on the pivot and the lockup.
- . No impact change after taking the scope off, and putting it back on.
- . The ideal mount for a second scope on the same rifle, or the same scope on multiple rifles.
- . A very elegant, and stable mount.

MAKflex

MAKflex mount. With rotation lock or lever lock. Order example 20 MAKflex mount with Rotation lock / for Zeiss ZM/VM prism für Zeiss ZM/VM Prisma **20 00** - **30**00 MAKflex-mount with Rotation lock 21 for EAW for Merkel **23** for Leupold Quick Release Basen for Original Steyr MAKflex mount with lever lock MAKflex Short Scope **Main Tube** LM Zeiss ZM/VM Swarovski Schmidt Bender Aimpoint Diameter Picatinny SR-Rail 1"/26 mm 30 mm 34 mm 36 mm Prism Rail Rail Micro 70 26 30 34 36 40 45 50 60 10 Order No:

MAK*flex* equipment

Aluminium ring Diameter 1"/26 mm

Height	Order.No
2,5 mm	2460-2602
5,0 mm	2460-2605
7,5 mm	2460-2607
10,0 mm	2460-2610



Aluminium ringDiameter 34 mm

Height	Order.No
2,5 mm	2460-3402
5,0 mm	2460-3405
7,5 mm	2460-3407
10,0 mm	2460-3410

Aluminium ringDiameter 30 mm

Height	Order.No
2,5 mm	2460-3002
5,0 mm	2460-3005
7,5 mm	2460-3007
10,0 mm	2460-3010

Aluminium ring Diameter 36 mm

Height	Order.No
2,5 mm	2460-3602
5,0 mm	2460-3605
7,5 mm	2460-3607
10,0 mm	2460-3610

Pivots

Height	Order.No
2,0 mm	2000-0002
4,0 mm (Standard)	2000-0004
6,0 mm	2000-0006
10,0 mm	2000-0010



Pivots with extension

Height 4,0 mm (Standard)	Order.No
Kröpfung 24 mm	2000-2440
Kröpfung 39 mm	2000-3940

Pivot for Steyr

Height	Order.No
4,0 mm	2400-0004



MAK*flex* equipment

Adapter for EAW-rear base		
Height	Order.No	
4,0 mm	1410-0000	



Adapter for original Steyr-rear base		
Height	Order.No	
7,0 mm	1440-1507	



Adapter for Original Merkel SL I und SL II rear base		
Height)	Order.No	
7,5 mm	1420-0807	



DETAL-/ STANAG-Adapter		
Order.No		
2460-0020		
2460-0040		
2460-0030		
2460-0080		
2460-0090		
2460-0060		
2460-0070		



Picatinny		
Length	Order.No	
120,0 mm	2460-50120	
160,0 mm	2460-50160	
500.0 mm	2460-50500	






Optics, just like the Aimpoint Micro which already is equipped with a Weaver-mount could be assemblies. The mounting rail is very adaptable.

MAKuick




- . Drop Barrel Guns
- . Bolt action Guns
- . Automatic or Semiautomatic Rifle
- . Blaser Mounts
- . Merkel KR 1, RX.Helix Mounts
- . Picatinny Rails
- . Factory- prepared weapons of Antonio Zoli, Bettinsoli, Blaser, BRNO, Browning, CZ, Finnclassic, Merkel, Sauer, Sabatti, Sako, Tikka
- . Function parts made of steel
- . With adapter rails mountable on nearly all kind of guns and rifles. (for example on Benelli Argo, Browning BAR, Chapuis express, Heckler & Koch etc.)
- . Fast and easy mounting and handling
- . Absolute reliability and accurate repeatability under using of any calibres.
- .As all MAK Products made with the goal of perfection considering highest quality standards

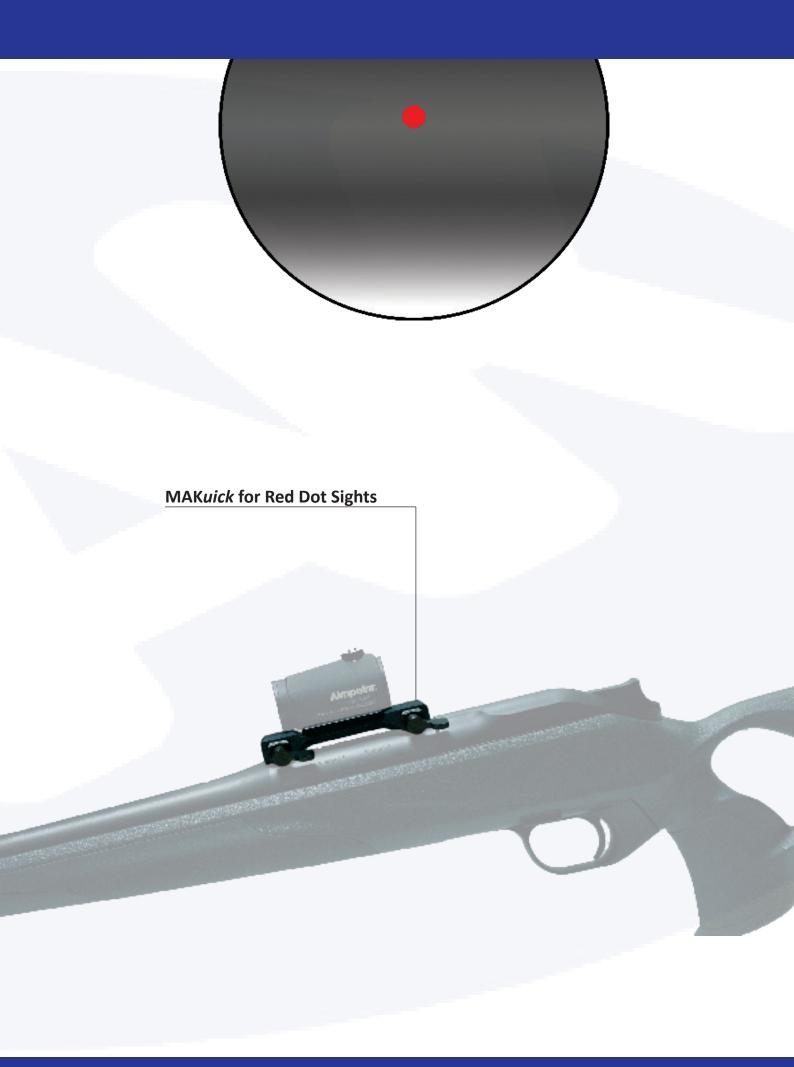

MAKuick quick release mount in one piece

Exemple 50

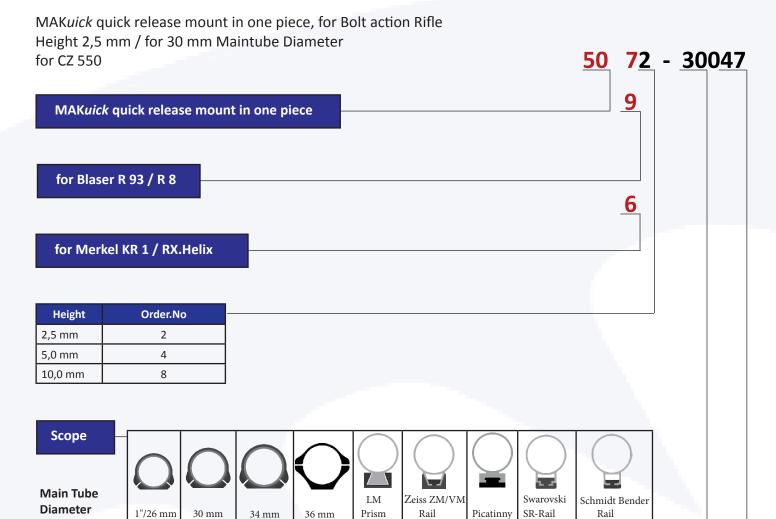

Manufacturer	Model	WKZ
Blaser	R 93 R 8	193 194
CZ	527 550	041 047
Merkel	KR 1 RX.Helix	162 163
Sauer	303 404	133 144
Sako	75 85 S 85 M	054 154 254
Tikka	Т3	107

Order.No

WKZ = ID Number for rifle



MAKuick quick release mounts in two pieces

Example 52

MAKuickquick release mount in two pieces for 30mm maintube diameter / for Mauser K98

5252 - 30 010

MAKuick quick release mount in two pieces for Bold Action

Scope				
Main Tale				
Main Tube			LM	Zeiss ZM/VM
Diameter 1'	"/26 mm	30 mm	Prisma	Rail
Order.No	26	30	40	45

WKZ = ID Number for rifle

Manufacturer	Model	WKZ.
Antonio Zoli	1900	067
Benelli	ARGO	003
Brno	CZ 527 / Fox / ZKB 680 ZKK 600 / CZ 550 CZ 531	041 047 065
Carl Gustav	1896 / 1900 2000/ 3000 4000	005 095 037
Fabarm	Iris	040
FN Browning	A-Bolt / Eurobolt BAR 1 / BAR 2 / CBL / Acera BLR / CLR European Browning Mauser	002 003 057 056 004
Heckler & Koch	SLB 2000	058
Heym	SR 20 SR 21 SR 30	060 039 099
Krico	600 / 700 / 900 / 902	006
Mauser	M 12 225 Titan 2 94 / 96 > Nr. 96011999 94 / 96 Nr. 96012000 > K 98	020 035 094 096 010
Parker Hale	Safari 1200	011
Remington	700 7400 / 7600	012 013

Manufacturer	Model	WKZ
Savage	110 / 116 Kojac	016
Schultz & Larsen	M 97	104
Steyr	Classic SBS M SL / L-Jagdmatch	089 086 018
Verney Carron	Auto Impact Bolt action Rifle	066 019
Voere	2165 Kufstein	021
Weatherby	Mark V / 300 / Vanguard	023
Winchester	70	024
Zastava	Mini Mauser 70	008 049






MAKuick quick release mount in one piece

Example 50

MAKuick quick release mount in one piece. for 12 mm rail

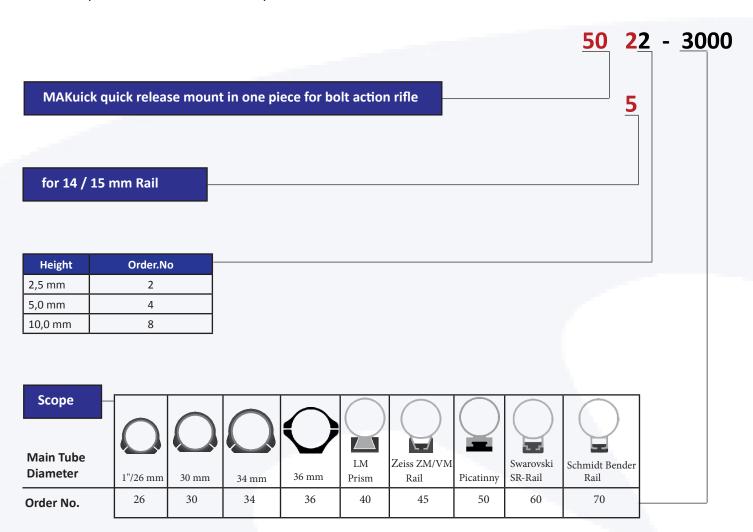



MAK*uick* Adapter Rails

Model	Order.No
Benelli Argo	5520-0003
B.Rizzini	5520-0502
Chapuis O/U Express Superpose	5520-0500
Chapuis S/S Express Superpose	5520-0503
F.A.I.R. techni-mec	5520-0501
FN-BAR	5520-0003
Heckler & Koch SLB 2000	5520-0058
Heckler & Koch SL 7	5520-0115
Marlin	5520-0120
Merkel SR 1	5520-0117
Remington 7400/7500/7600	5520-0013
Verney Carron Auto Impact	5520-0066
Zoli Drilling	5520-0200



MAKipp

MAKipp Mount

- .Highest shot strength
- . Adamant firmly
- . Elegant mounting
- .Fast Mounting







MAKipp fixed mounts for Drop Barrel Guns

Example 51

MAKipp fixed mounts in one piece / for 12 mm rail

<u>51 22 - 30 00</u>

MAKipp mount in one piece for drop barrel guns

Height	Order.No
2,5 mm	2
5,0 mm	4
10,0 mm	8

Scope	\bigcap			\bigcirc			
Main Tube Diameter	1"/26 mm	30 mm	34 mm	36 mm	LM Prism	Zeiss ZM/VM Rail	Picatinny
Order.No	26	30	34	36	40	45	50



(Adapter rails see page 27)

MAKipp fixed mounts in two pieces

MAKipp fixed mount in two pieces, Aircraft grade Aluminium, function parts made out of hardened steel

Model	Offset	Order.No
CZ 550	without Offset with Offset	5310-30047 5312-30047
CZ 527	without Offset	5310-30041
Blaser R 93	with Offset	5312-30193

without Offset





with Offset





MAK*fix* fixed mount

- . Only for diameter 1" and 30 mm
- . Recoil proof, by means of a recoil lug milled in the solid front ring.
- . Extremely stable.
- . A very low mounted scope is possible with this mount.
- . Especially recommended when the rifle does not have open sights.
- . A very elegant, proportioned mount.
- . This mount is easy to install, and therefore very interesting price-wise.
- . Available in several heights between scope and action, from 11,0 mm to 20,0 mm
- . Available with offset on the front foot suitable for the new shorter scopes.





MAKfix fixed mounts with steel rings in two pieces for bolt action rifle

Example 40

MAKfix fixed mount in two pieces for 30mm main tube diameter / for Mauser K98

MAKfix fixed mount in two pieces for bolt action rifle

Height	Order.No
11,0 mm	0
14,0 mm	1
17,0 mm	2
20,0 mm	5

Offset of front foot	Order.No		
0,0 mm	2		
34,0 mm	4		

 Main Tube
 1"/26 mm
 30 mm

 Order.No
 26
 30

40 0 0 - 30 010

Manufacturer	Model	WKZ.
Antonio Zoli	1900	067
Benelli	ARGO	003
Brno	CZ 527 / Fox / ZKB 680 ZKK 600 / CZ 550 CZ 531	041 047 065
Carl Gustav	1896 / 1900 2000/ 3000 4000	005 095 037
Fabarm	Iris	040
FN Browning	A-Bolt / Eurobolt BAR 1 / BAR 2 / CBL / Acera BLR / CLR European Browning Mauser X-Bolt	002 003 057 056 004 128
Haenel	Jaeger 10	110
Heckler & Koch	SLB 2000	058
Heym	SR 20 SR 21 SR 30	060 039 099
Kongsberg	M389	061
Krico	600 / 700 / 900 / 902	006
Lakelander	M 389	071
Mauser	M 12 225 Titan 2 66 94 / 96 > Nr. 96011999 94 / 96 Nr. 96012000 > K 98	020 035 009 094 096 010
Merkel	SR 1	117
Parker Hale	Safari 1200	011
Remington	700 7400 / 7600 seven	012 013 078

Manufacturer	Model	WKZ.
RWS/Rössler	Titan 6	108
Sabatti	Rover	075
Sako	Forester/Finnbear/ Finnwolf 75 / 85	053 054
Santa Barbara	Bolt action rifle	044
Sauer	80 / 90 / 92 200 202 100 101 STR	015 059 080 082 081 106
Savage	110 / 116 Kojak	016
Schultz & Larssen	M 97	104
Steyr	Classic SBS L M 086 SM 12 SL / L-Jagdmatch Ultra Light Scout Luxus	089 093 086 090 018 111 112 127
Swiss Arms	SHR 970	109
Tikka	55 / 65 / 558 / 658 590 / 690 Master T 3	031 043 038 107
Verney Carron	Automat Bolt action rifle	066 019
Voere	2165 Kufstein Titan 2 2185 Automat	021 045 083
Weatherby	Mark V / 300 / Van- guard	023
Winchester	70 70 Modell.223 /.243 SXR Vulkan	024 114 115

Innovative



MAKnetic



MAKugel



MAKlick

Extremely stable Extremely flexiblel Extremely low Extremely simple to mount



- 1. Vertical adjustment (pivot tension) through adjustable pivot
- 2. Horizontal adjustment (shot direction) through adjustable lug
- 3. Lockup by pivot rotation

MAKnetic

The removable assembly for guns without smallest change in the weapon!

The ideal assembly for the connection between the new Aimpoint Micro T-1 and your weapon.

After the great success of our innovative Mount MAKlick, we put another landmark in the history of the assembly technology with MAKnetic.

MAKnetic is the newest development from MAK and connects extremely reliably the red dot sight and guns without smallest change in the weapon.

MAKugel

MAKugel is the latest MAK product for mounting DOCTER Sight on weaver/picatinny rails with absolute stability and return to zero after take off.

MAK*lick* Mountsystem for Dot Sight

Extremely stable
Extremely low
Extremely flexible
Simple to mount

- 1. Vertical adjustment (pivot tension) through adjustable pivot
- 2. Horizontal adjustment (shot direction) through adjustable lug
- 3. Lockup by pivot rotation



MAKlick – the red dot mount for the front bases of pivot mounts any brand

MAK <i>lick</i> Mount	Order.No	
for Docter Sight with Adapter	3000-9000	
for Aimpoint Micro	3000-1000	
for Aimpoint Comp	3000-3000	
for Aimpoint Z-Point	3000-5000	

MAK <i>lick</i> Adapter	Order.No
for Aimpoint Micro	3100-1000
Ring for Aimpoint Comp	3300-3000
for Picatinny Adapter	3500-5000





MAK*netic* Mountsystem for Dot Sight

MAK*netic* for mounting red dot sight on Bolt action Rifle

MAKnetick Mount	Order No.
for Docter Sight & Blaser R 93	301939000
for Aimpoint Micro & Blaser R 93	30193-1000
for Docter Sight & Blaser R 8	30194-9000
for Aimpoint Micro & Blaser R 8	30194-1000
for Docter Sight & Mauser M 03	30103-9000
for Docter Sight & Merkel KR 1	30162-9000
for Aimpoint Micro & Merkel KR 1	30162-1000
for Docter Sight & Sauer 303	30133-9000



MAKnetic for mounting red dot sights on shotguns

MAK <i>netic</i> Mount	Order.No
for Docter Sight & 6 mm Rail	3006-9000
for Docter Sight & 8 mm Rail	3008-9000
for Docter Sight & 10 mm Rail	3010-9000
for Docter Sight & 12 mm Rail	3012-9000
for Docter Sight & 14 mm Rail	3014-9000
for Aimpoint Micro & 10 mm Rail	3010-1000
for Aimpoint Micro & 12 mm Rail	3012-1000
for Aimpoint Micro & 14 mm Rail	3014-1000


MAKugel

MAK <i>ugel</i> for the assembly of dot sights Prisma and Picatinny rails	Order.No
for Docter Sight 12 mm Prism	5612-9000
for Aimpoint Micro 12 mm Prism	5612-1000
for Docter Sight 14 / 15 mm Prism	5614-9000
for Aimpoint 14 / 15 mm Prism	5614-1000
for Docter Sight Weaver Picatinny Rail	5650-9000
for Aimpoint Weaver Picatinny Rail	5650-1000
for Docter Sight Sako	56054-9000
for Aimpoint Sako	56054-1000
for Docter Sight CZ 550	56047-9000
for Aimpoint CZ 550	56047-1000
for Docter Sight Tikka T 3	56107-9000
for Aimpoint Tikka T 3	56107-1000



Adapter for red dot sights and Leupold QR-Basen	Order.No
for Docter Sight	2330-9000
for Aimpoint Micro	2330-1000



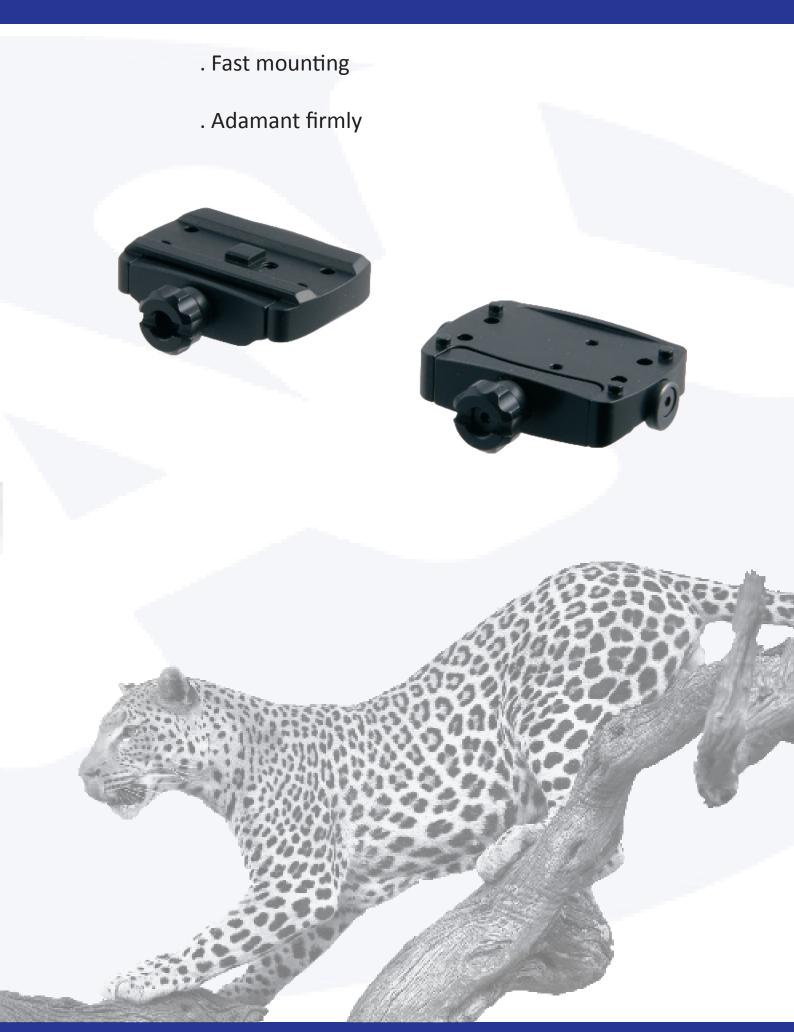

Tactical and Sport



veloped a concept on Military Standard Picatinny base platform. For all aiming devices, day optics, night optics, thermal vision, etc. Anything that professional Law Enforcement and Military operators can and will use. Exists in both fixed, and quick release version, always tested in the extreme for stability, recoil proof (Cal.50), repeatability, all weather resistant, mission ready tool.



MAKmilmont Monoblockmount for Picatinny Rail

Diameter	Height	Order No.
30,0 mm	17,0 mm / 20 MOA	57620-3000
30,0 mm	23,0 mm / 0 MOA	57600-3010
30,0 mm	23,0 mm / 20 MOA	57620-3010
34,0 mm	17,0 mm / 0 MOA	57600-3400
34,0 mm	17,0 mm / 20 MOA	57620-3400
34,0 mm	23,0 mm / 0 MOA	57600-3410
34,0 mm	23,0 mm / 20 MOA	57620-3410



Milmont with tactical ring

Order No.: 57620-3445



MAKmilmont with 2" Offset Height 23,0 mm

MAK <i>milmon</i> t mit 2" Offset	Order No.
Diameter 26,0 mm with Tactical Ring and Plastic insert	58600-2602
Diameter 30,0 mm with Tactical Ring	58600-3002
Diameter 34,0 mm with Tactical Ring	58600-3402

Comes with pictured tactical rings with multiple interfaces (without Picatinny Adapter)

MAK <i>milmont</i> mit 2" Offset Mountbases	Order No.
Height 18,0 mm (without Ring)	58600-0002



MAKmilmont quick release mount in two pieces

Order No.

10,0 mm

10

26

30


34

40

45

60

Example 58 MAKmilmont Quick-release mounting two pieces / Height 12 mm for Main Tube Diameter 30 mm 58 5 0 - 30 00 MAKmilmont quick release mount in two pieces **For Picatinny Rails** Height Order No. 0 12,0 mm 21,0 mm 6 Scope **Main Tube** LM Zeiss ZM/VM Swarovski Diameter Prism 1"/26 mm 30 mm Rail 34 mm SR-Rail

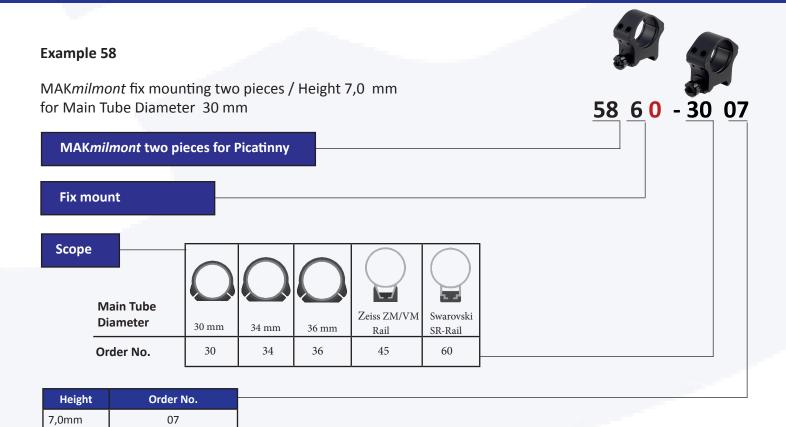

MAK*milmont* equipment

MAKmilmont Tactical Ring

Diameter	Height	Order No.
30,0 mm	Tactical Ring / Height 5,0 mm / with interfaces 45°divided	24645-3005
34,0 mm	Tactical Ring / Height 5,0 mm / with interfaces 45°divided	24645-3405



Diameter	Height	Order No.
30,0 mm	Tactical Ring / Height 5,0 mm / with interfaces	24605-3005
34,0 mm	Tactical Ring / Height 5,0 mm / with interfaces	24605-3405



Diameter	Height	Order No.
30,0 mm	Takctical Ring / Height 5,0 mm / shared side interfaces 45 °	24655-3005
34,0 mm	Takctical Ring / Height 5,0 mm / shared side interfaces 45 °	24655-3405
34,0 mm	Takctical Ring / Height 7,5 mm / shared side interfaces 45 °	24655-3407



Picatinny Rails for Automatic Rifles



MAK*milmont* equipment



Order No.: 5760-0000



Order No.: 5750-0000

(1) Picatinny Adapter	3300-5000
(2) Picatinny Adapter offset	3300-5100
(3) Aimpoint Micro H1 Adapter	3300-1000
(4) Docter Sight Adapter	3300-9000
(5) Adapterring Height 5,0 mm (for flashlight)	3300-2605



MAKmilmont for Red point sights

With adjustable and fixable clamping system with Lock. Fits Picatinny rails. All functional parts made of steel.

for Aimpoint Micro

Height	Order Nr.						
24,0 mm	5856-1000						




for Docter Sight

Height	Order Nr.
24,0 mm	5856-9000



Optik



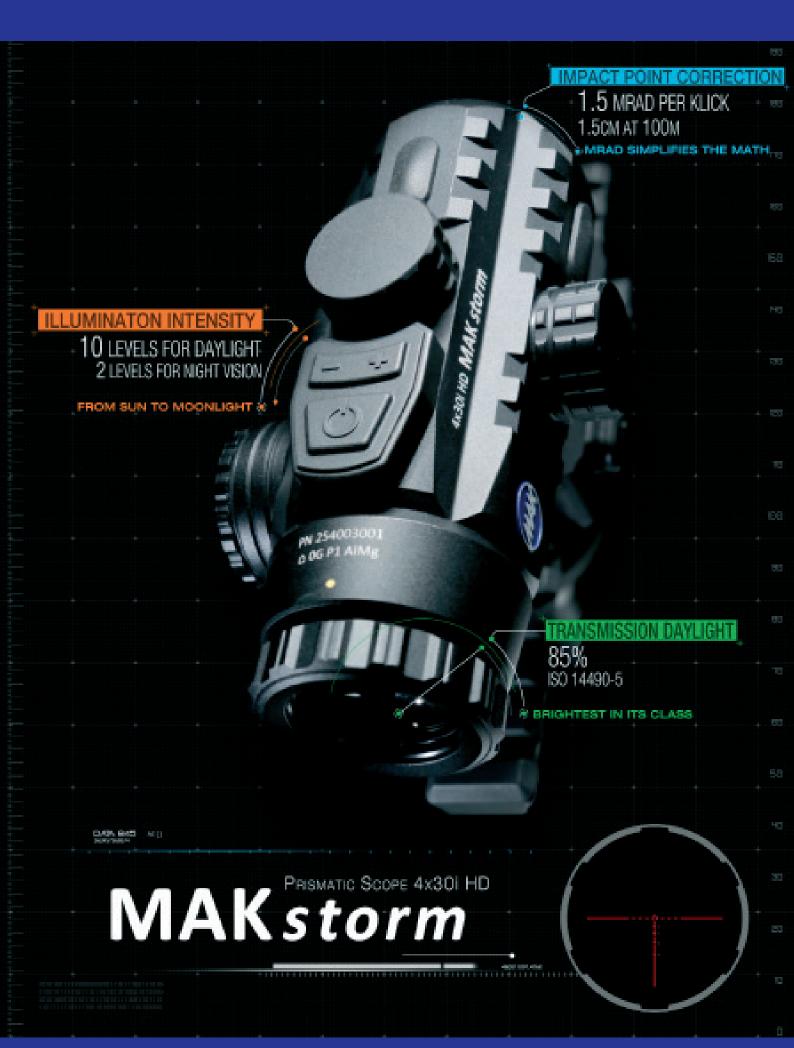

MAKcam

The MAKcam is a compact camera system for mounting on a telescopic sight and image recording without impairing the function and handling of the telescopic sight. Thus, the direct targets through the telescopic sight, shooting and video recording is also possible. This is the MAKcam the ideal partner for recording hunting experiences, as well as training in sport and to preserve evidence in official operations. The video or still image recording is done internally. In addition, a Livestream to a computer (e.g. laptop) and external recording is possible.

The MAKcam is available in two versions: 16GB and 32GB storage. The video quality and image size is 720x480 pixels at 30 frames per second. The battery life is 60min. (16GB) or 180min. (32 GB). The milled from a solid 7075 aluminum housing is according to standard IP 67 waterproof to 1m. Thanks to the high-quality coating (Hard Coatiert) are the housing and the mounting Robust and resistant to corrosion. Power is supplied by an integrated lithium polymer battery and can be charged via USB.

Technical specification

Order Number	140090002	140090003
Recording Format	AVI / JPEG	AVI / JPEG
Resolution	720 x 480 30 pictures/sec	720 x 480 30 Bilder/sec
Internal memory	16 GB	32 GB
Battery life / Recording time	60 min	180 min
Housing	7075 milled from solid, hard-coated beam splitter 950 nm, Modular Assembly with fuse, four warts closure, for all popular scopes	7075 milled from solid, hard-coated beam splitter 950 nm, Modular Assem- bly with fuse, four warts closure, for all popular scopes
Fall Fest / waterproofing	1,5 m / 1 m	1,5 m / 1 m
Certification / standards	IP 66 / gem. MIL-STD.	IP 66 / gem. MIL-STD.
Connector	USB, 12 V, 230 V	USB, 12 V, 230 V
Size	87 x 60 x 41 mm	93 x 63 x 41 mm
Weight	210 g	230 g
Delivery	MAKcam camera mounting , Outdoor Case Volt adapter , Power Bank with charging ca Microfiber cleaning cloth , allen wrench .	

MAKcam equipment



MAKstorm



Technical specifications

Brand	MAK
Model	MAKstorm
Тур	4x30 i HD
Objektive lens	30 mm
Actual Magnification	4 x
Exit pupil	7,3 mm
Exit pupil distance	56 mm
Field of view at m/100 m	13,1 m / 100 m
Field of view (dagrees)	7,5°
Dioptric compensation (dpt)	+2/-2,5
Transmission daylight acc.ISO 14490-5	85 %
Impact point corr.per click (mrad)	0,15
Max elev/wind adjustm range (mrad)	20
Waterproofing	1 m
Objektif connection	M 36 x 0,75
Mount (picatinny clamp)	removable
Length	118 mm
Weight	398 g
Housing material	6061 T
Illumination Intensity levels	Digital 10 + 2
Battery Type	CR 2032
Battery life in medium intensity	120 hour



Order by Fax Fax Nr.: +49 9723-93805-129

Distribution of our products exclusively through selected retailers

PURCHASE ORDER TEMPLATE FOR RETAILERS

(Please copy fax form and return it to the above fax number - . Thanks!) We order binding the products mentioned in the list and accept the delivery and payment of the MAK Group

Quantity	Order Nr.								Article description		
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					
						-					

General

Business operations of Kilic Feintechnik GmbH

§ 1 General

- (1) It is only our terms and conditions we recognize this conflicting or deviating conditions only unless we have agreed to their validity in writing. Our sales conditions also apply if we are aware of conflicting or deviating conditions of the customer the delivery without reservation.
- (2) All agreements made between us and the customer for the execution of the contract require the written resignation or confirmation, so far as is otherwise provided.

§ 2 Offer

- (1) If the order qualifies as an offer pursuant to § 145 BGB, we can accept it within 2 weeks. We reserve the right
- (2) to illustrations, drawings, calculations and other documents we have all property rights and copyrights.

§ 3 Prices & terms of payment

- (1) Unless otherwise stated in the order confirmation deviates our prices are "ex works" and exclusive these will be charged separately.
- (2) The prices do not include VAT. This is stated in the respective statutory amount on the day of invoicing separately in the invoice.
- (3) Unless otherwise stated in the order confirmation deviates our purchase price is due within 30 days from date of invoice net for merchants. The statutory rules on late payment interest shall i .H. v . 4 % pay (at merchants i.H.v. 8 %) above the ECB's interest rate from the due date on (4) The discount requires a special written agreement .
- (5) The amount will be credited to eradicate due respectively at this time demand oldest to the
- (6) Off rights to the customer only if his counterclaims rights recognized by us, are undisputed or legally
- (7) If the customer is a merchant is in addition the following: View reserve the right to change our prices accordingly, if occurring after conclusion of the contract

- cost reductions or cost increases, in particular due to collective agreements, material price changes or new taxes. We will prove the customer on request.
- (8) Change to be taken only by prior arrangement and this mutual written confirmation.

§ 4 Delivery Time

- (1) The beginning of the delivery period presupposes the clarification of all technical questions.
- (2) Compliance with our delivery obligation also requires the timely and proper fulfillment of the customer's obligations.
- (3) We must not exceed the delivery date by up to 3 weeks without us thereby in default, and we reserve if necessary to afford partial deliveries.
- (4) We are also liable under the statutory provisions if the delay in delivery of a willful or grossly negligent breach of contract.
- Here our representatives or agents is attributable to us. If the delivery delay is not due to be caused by our deliberate infringement, our liability for damages is limited only to the predictable, typically occurring damage.
- (5) If the customer is in default of acceptance or culpably violates other obligations to cooperate, we are entitled to demand damages in this respect, including any additional expenses. The risk of accidental loss or accidental deterioration of the goods is at the moment in which the customer is located in an acceptance or payment, about this. Further claims remain reserved.
- § 5 Transfer of Risk & shipping
- (1) Provided that the order confirmation does not deviant, delivery is agreed "ex works".
- (2) The goods are transported at the expense and risk of the customer, including freight deliveries.
- (3) If the customer wishes, we will cover the delivery by transport insurance, this regard shall be borne by the customer.
- (4) Returned goods may only be made with our consent and require written Confirmation from us. You must postage and place freight-free. The inspiration of a processing fee we reserve after expenditure.

- § 6 Retention of title
- (1) We retain title to the goods delivered by us until full payment, at dedication of checks or drafts until their redemption and credit before.
- (2) If the customer is a merchant is in addition. We reserve the title to the goods until receipt before all payments from the business relationship with the customer. The customer is entitled to resell the goods in the ordinary course of business, he assigns to us already with your order or order acceptance in advance all claims in the amount of the invoice final amount including VAT of our claim, which accrue from the resale against its customers. regardless of whether the goods were resold before or after processing. To collect the customer remains authorized also after assignment. Our authority to collect the claim itself remains unaffected. But we are committed itself not to collect the claim as long as the customer meets its payment obligations, and in particular no application to open insolvency or composition proceedings or suspended payments. If this is the case, we shall have the right, in our being announced with respect to the assigned receivable debtors, information necessary for collection tells hand over the relevant documents and informs the debtor is from the assign-
- (3) If third parties seizure or other interventions, the customer must inform us immediately in writing so that we can § 771 ZPO according to us. If the third party
- according to us. If the third party is unable to reimburse us for the relevant administrative and judicial costs, the customer is liable for the loss incurred.

§ 7 Warranty & Guarantee

The statutory warranty rights . In addition, we provide for our goods a guarantee for the period of 10 years from date of receipt of the goods. However, the guarantee can only be claimed if and only be accepted by us when the goods are in their original condition. By any change or damage to the warranty. Costs incurred for returning the goods are payable by our customer, we shall be kept free of all costs.

- § 8 Jurisdiction,
- Applicable law and place of performance.
- (1) If the customer is a businessman, our registered office jurisdiction.
- (2) The law of the Federal Republic of Germany
- (3) Provided that the order confirmation does not deviant, our place of business is fulfillment.

State 11.04.2006



Kilic Feintechnik GmbH Heidenfelderstraße 1 97525 Schwebheim / Germany

Telefon: +49 9723 93805-0

Fax: +49 9723 93805-129

e-mail: kilic@mak.ag

www.mak.ag